

Celio by Gebesa

Celio is designed for workspaces that need a confident, professional chair with a clean and modern presence. Its streamlined silhouette brings a polished aesthetic to private offices, meeting rooms, and open work areas, while offering ergonomic options that support comfort throughout the day.

Built with Italian quality and certified to BIFMA standards. Celio delivers dependable performance, straightforward ergonomics, and a professional look for modern task seating environments.

Benefits

- Two back options: mesh and upholstered back.
- Two mechanism options: **Vibe** (weight sensing) and **Lynx** (full synchro with seat depth).
- Configurable arm options: armless, 1D arms, and 4D arms.
- Clean, professional aesthetic for modern workspaces.
- Expandable ergonomic options, including arms, headrest, and seat depth adjustments.
- Easy specification for contract and project-based applications.
- Italian quality, BIFMA certified, warranted for users up to 300 lbs.



*Celio with upholstered back shown

General information

Certifications:

- BIFMA certified, warranted for users up to 300 lbs.
- Grade B Duvaltex Open House: CA TB 117-2013 Sec. 1

Key Features

- Italian quality manufacturing
- Upholstered option available
- Class-leading mechanism options

Warranty

- Frame and Mechanism: 10 years
- Fabric and Mesh: 5 years

COM Available



Lynx mechanism shown

Components

1) Mechanism:

- Vibe: Weight Sensing Mechanism
- Lynx: Full Synchro Mechanism with seat depth adjustment

2) Backrest

- **Mesh** — back with lumbar support
 - **Upholstered** — back with integrated lumbar support
- Headrest version available on both.*

3) Armrest

- Armless
- 1D Arms
- 4D Arms


4) Base


- Nylon Base / Aluminum Base
- Universal Casters
- Gas Lift: Class IV

5) Seat

- Upholstered seat: Grade B Duvaltex Open House
- Seat depth adjustment included with Lynx mechanism.
 - Lynx seat travel: 60mm.

Overall dimensions

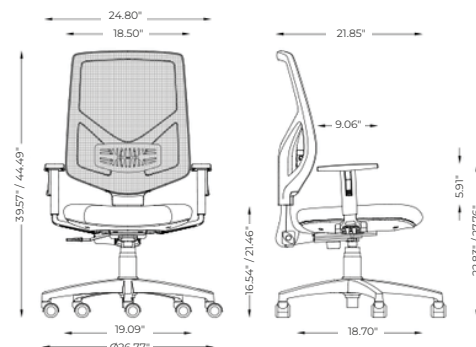

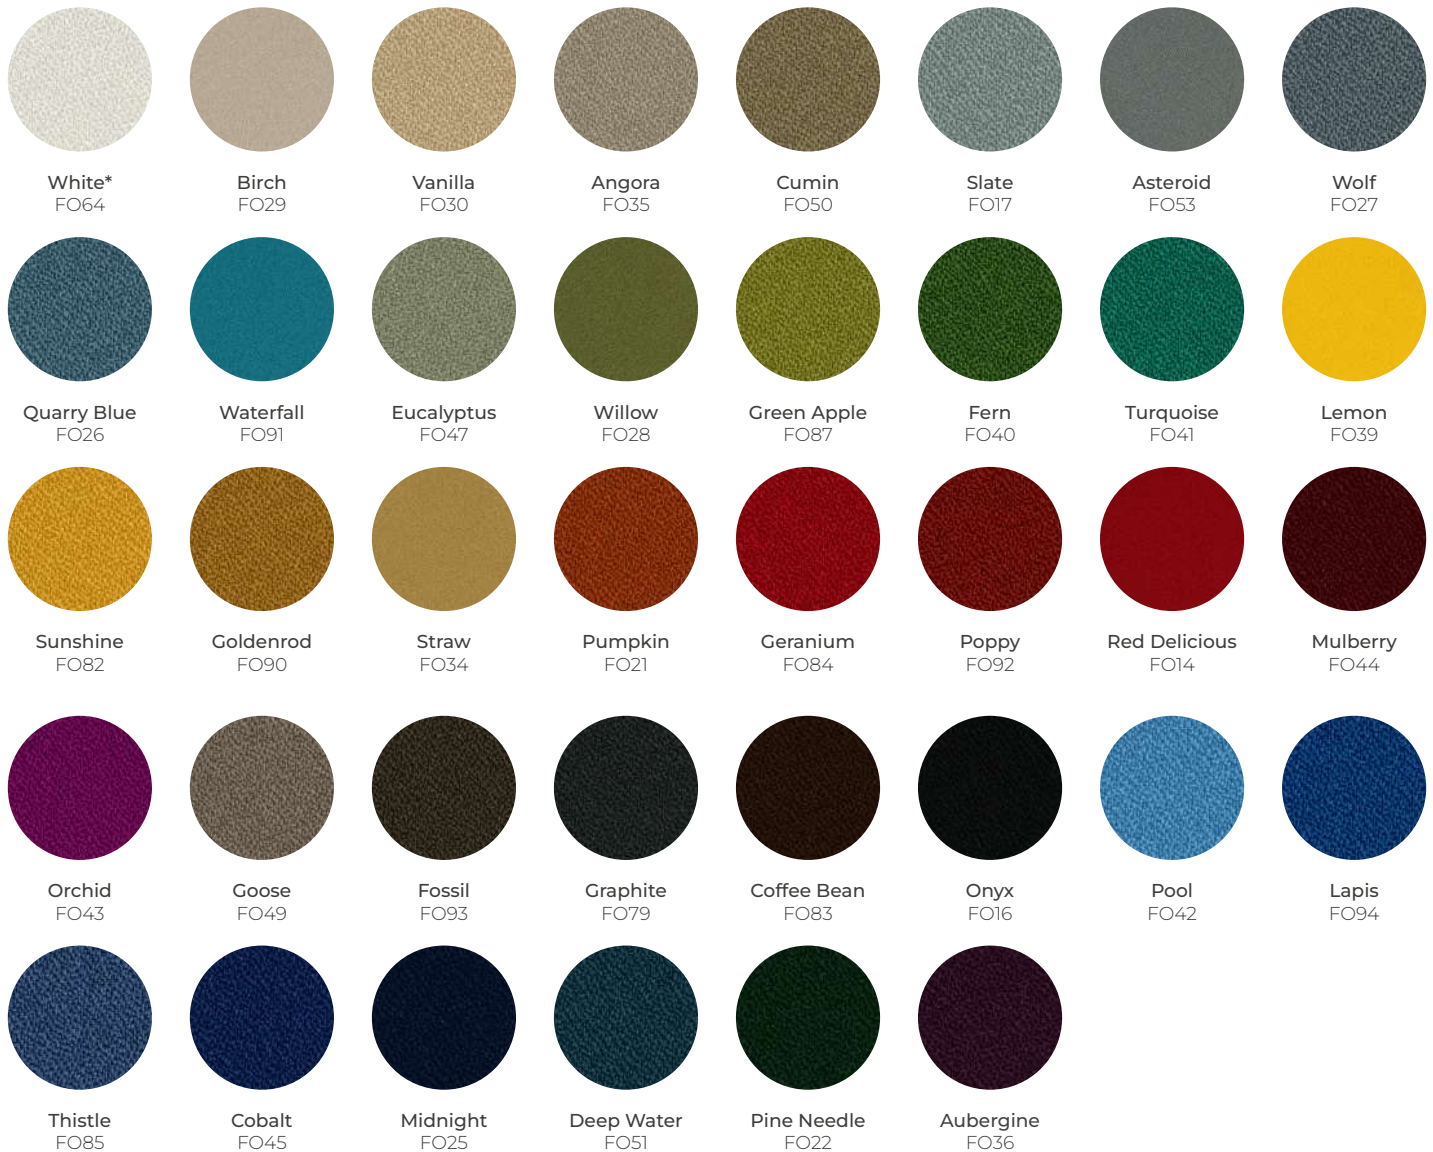

Grade	Grade B	Weight	13.1 oz./lin. yd (296 g/m ²)
Brand	Duvaltex	Abrasion	100,000 double rubs (ASTM D4157) 100,000 cycles (ISO 12947-2)
Content	100% post-consumer recycled polyester	Lightfastness	Grade 4 min. at 40 hours (AATCC 16.3 Option 3)
Width	54" (137 cm) min. useable	Flammability	CA TB 117-2013 Sec. 1 ASTM E84 Class I or A EN 1021-1 (Cigarette) EN 1021-2 (Match)

This sample is representative of the material to be supplied and may not indicate an exact match; some variations may occur.