


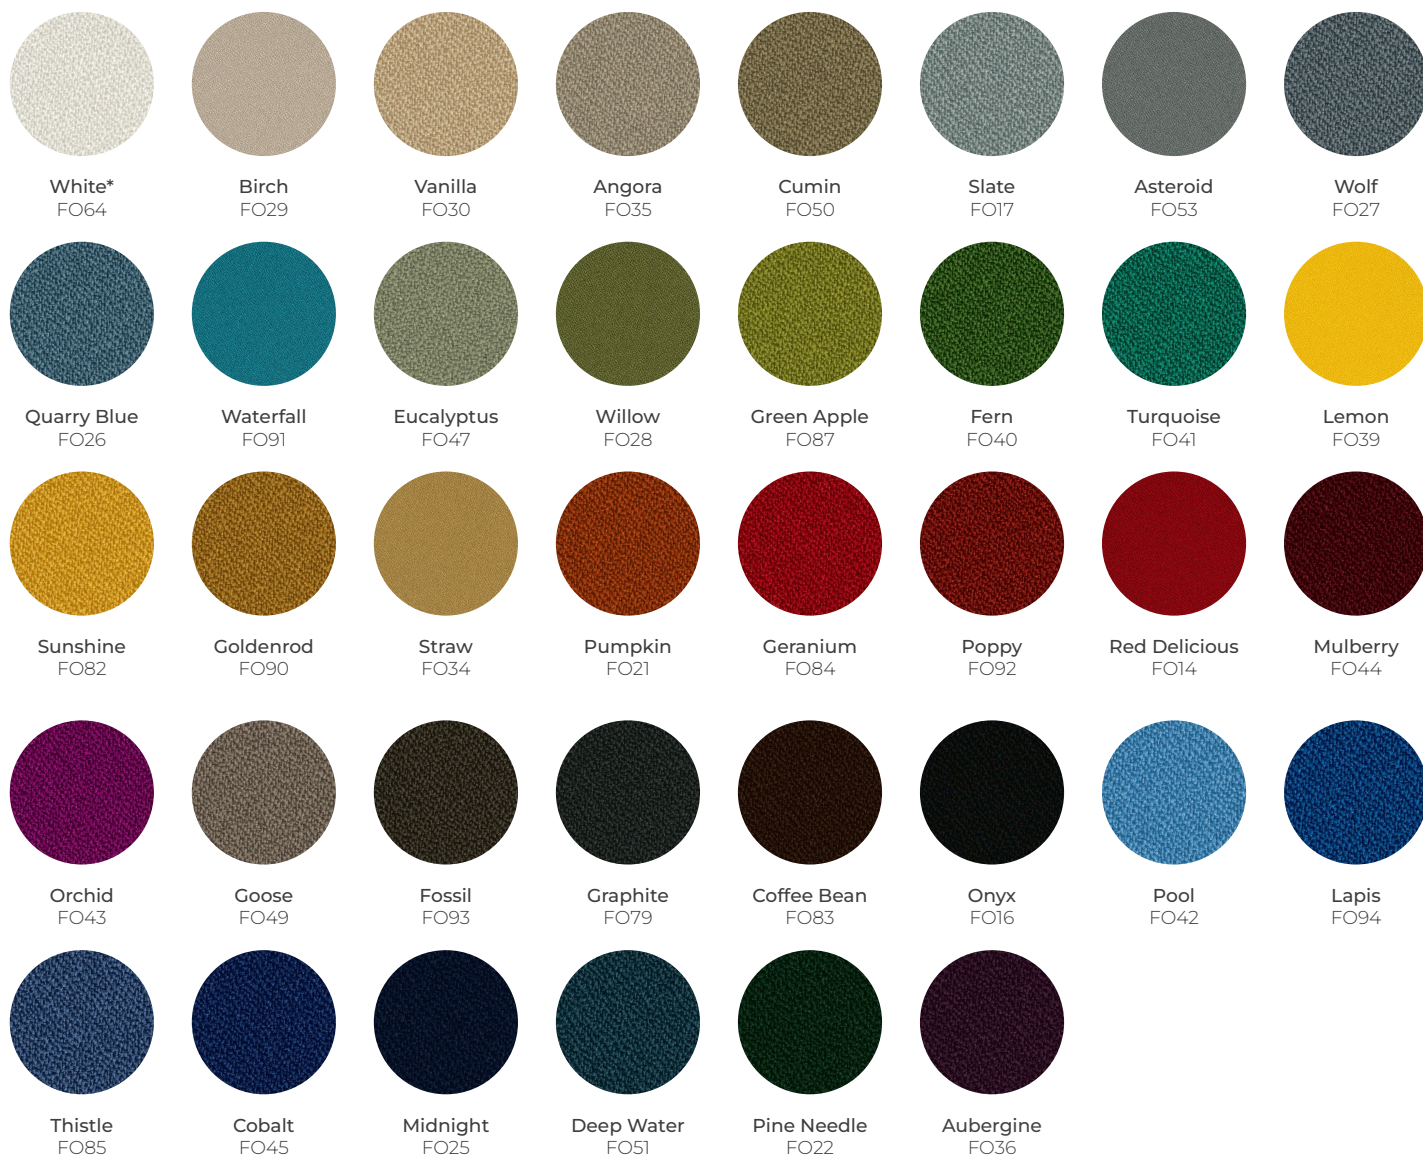

Grade Grade B

Weight 13.1 oz/lin. yd (296 g/m²)

Brand Duvaltex

Abrasion 100,000 double rubs (ASTM D4157)
100,000 cycles (ISO 12947-2)

Content 100% post-consumer
recycled polyester

Lightfastness Grade 4 min. at 40 hours
(AATCC 16.3 Option 3)

Width 54" (137 cm) min. useable

Flammability CA TB 117-2013 Sec. 1
ASTM E84 Class I or A
EN 1021-1 (Cigarette)
EN 1021-2 (Match)

This sample is representative of the material to be supplied and may not indicate an exact match; some variations may occur.

Brisa



Grade Grade C

Brand UltraFabrics

Content 100% polycarbonate polyurethane surface; 65% recycled polyester / 35% FSC/PEFC certified rayon backing

Width 54" (137 cm)


Abrasion 300,000 double rubs (ASTM D4157)
160,000 rubs (ISO 12947-2)

Lightfastness Grade 4 at 200 hours (AATCC 16.3)
Grade 6 (ISO 105 B02)

Environmental PFAS-free
SCS Indoor Advantage Gold certified
REACH compliant
Does not contain any Red List chemicals

This sample is representative of the material to be supplied and may not indicate an exact match; some variations may occur.

Brisa

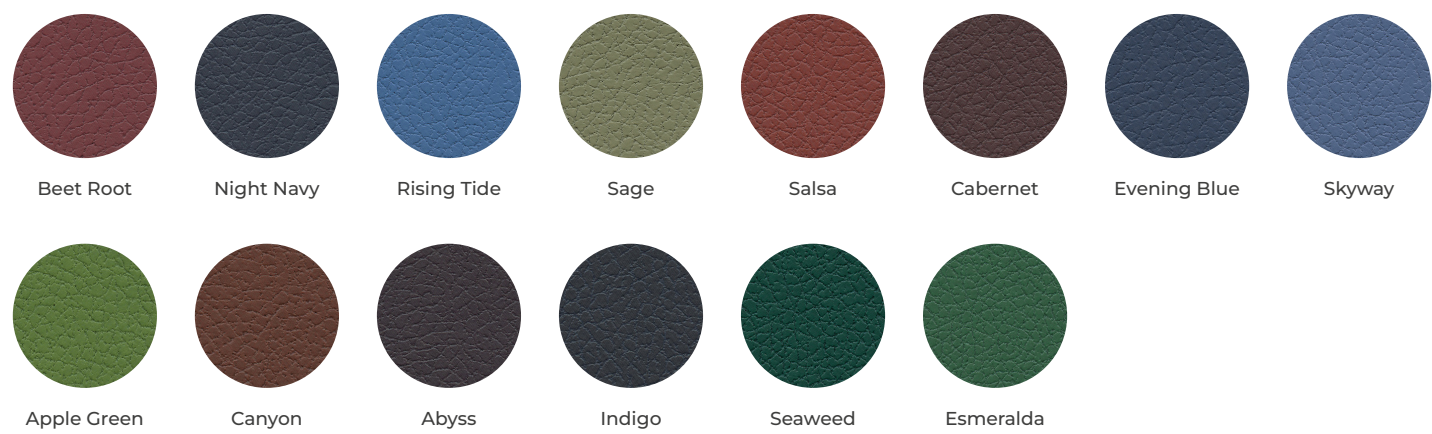

Grade	Grade C	Abrasion	300,000 double rubs (ASTM D4157) 160,000 rubs (ISO 12947-2)
Brand	UltraFabrics	Lightfastness	Grade 4 at 200 hours (AATCC 16.3) Grade 6 (ISO 105 B02)
Content	100% polycarbonate polyurethane surface; 65% recycled polyester / 35% FSC/PEFC certified rayon backing	Environmental	PFAS-free SCS Indoor Advantage Gold certified REACH compliant Does not contain any Red List chemicals
Width	54" (137 cm)		

This sample is representative of the material to be supplied and may not indicate an exact match; some variations may occur.


Impasto - Uf Select



Ice Storm



Almond Milk




Incense




Snickerdoodle




Arctic Fox




Thunder




Golden Ochre



Roasted Squash




Bristle Blue



Light Moss




Tofu




Amberglow




Mahogany Red



Deepwell



Avocado



Caribou




Tiger Eye



Firecracker



Nocturne Blue




Pine Needle



Black Spinel



Pumpernickel



Kalamata



Bay Leaf



Genesis

Grade Grade B

Brand UltraFabrics

Content Polycarbonate blended surface;
65% polyester / 35% cotton backing

Width 54" (137 cm)

Weight 13.1 oz/sq. yd (445 g/m²)


Abrasion 200,000 double rubs (ASTM D4157)
150,000 rubs (ISO 12947-2)

Lightfastness Grade 4 at 200 hours (AATCC 16.3)
Grade 6 (ISO 105 B02)

Environmental ASTM E84 (adhered) Class A
CA TB 117-2013 Pass
FMVSS 302 Pass
NFPA 260 Class 1
UFAC Class 1
AB 2998

This sample is representative of the material to be supplied and may not indicate an exact match; some variations may occur.

Lino - Uf Select

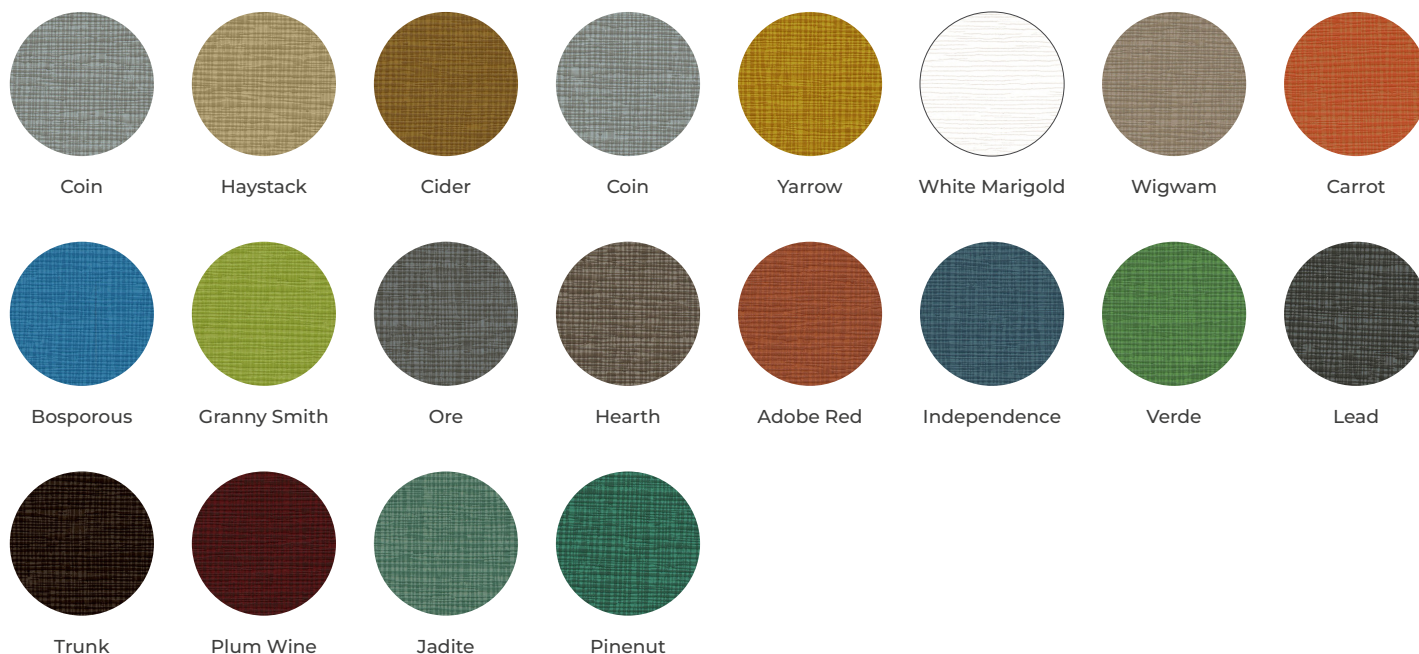

Grade Grade B

Brand UltraFabrics

Content Polycarbonate blended surface
65% polyester / 35% cotton backing

Width 54" (137 cm)

Weight 13.1 oz/sq. yd (445 g/m²)

Abrasion 200,000 double rubs (ASTM D4157)
150,000 rubs (ISO 12947-2)

Lightfastness Grade 4 at 200 hours (AATCC 16.3)
Grade 6 (ISO 105 B02)

Environmental ASTM E84 (adhered) Class A
CA TB 117-2013 Pass
FMVSS 302 Pass
NFPA 260 Class 1
UFAC Class 1
AB 2998
EN 1021-1 & -2

This sample is representative of the material to be supplied and may not indicate an exact match; some variations may occur.

Montage - Uf Select



Grade Grade B

Brand UltraFabrics

Content 100% polycarbonate polyurethane surface; 65% recycled polyester / 35% FSC/PEFC certified rayon backing

Width 54" (137 cm)

Abrasion 300,000 double rubs (ASTM D4157)
160,000 rubs (ISO 12947-2)

Lightfastness Grade 4 at 200 hours (AATCC 16.3)
Grade 6 (ISO 105 B02)

Environmental PFAS-free
SCS Indoor Advantage Gold certified
REACH compliant
Does not contain any Red List chemicals

This sample is representative of the material to be supplied and may not indicate an exact match; some variations may occur.